





F.

		1	2 / 3
( ) 1	4	1450	570
	8	900	380
		0 dBu	+3 dBu
		10	20
( ) 10		20 -20	+/- 0,5
	(SMPTE-1)	<0,1%	1
		60	(1 )
	/ ( )	100	
		300	8
		1.	/ /
		2.	( Sm 3600)
		Protect ( ): 3	
		Signal ( ): 3	
		Clip ( ): 3	
			: 1
			: speak-on
		110-120	220-240 ~, 50/60
(4 ,3 1 )		4	
	:	483x400x88,8	( x x )
		22	



1. (ON/OFF)

2.

3. (CLIP)

( 0,5%).

4. (SIG)

3.

5. (POWER)

6. (CH1/CH2)

1 2

OFF

7.

IEC

8.




1 2

(XLR + 1/4")

2 3.




2 3,

CH2/CH3 (PARALLEL),

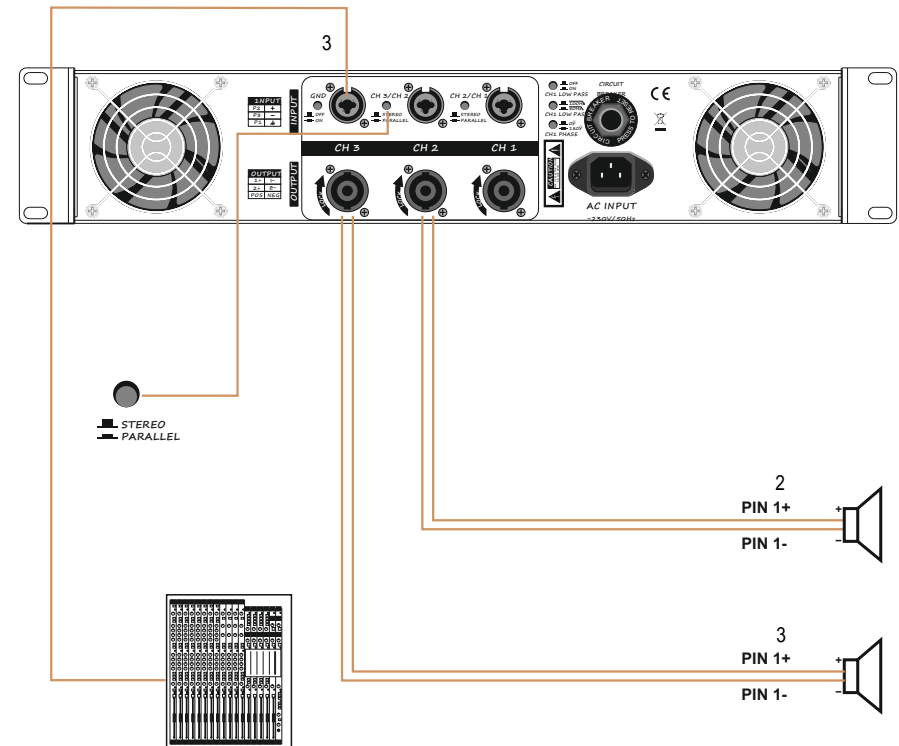

2 3. , 1 2,

CH1/CH2 (PARALLEL),

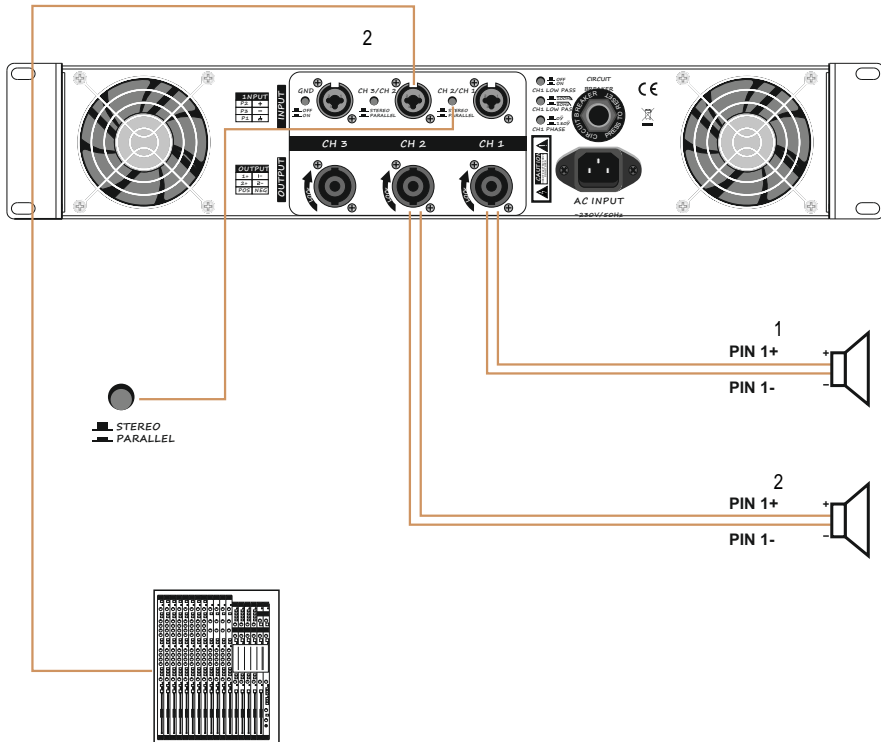


9. GND LIFT , ( )
10. : parallel stereo.
- 1) (PARALLEL) ;
- 1 2, 1 2,
- 2) (STEREO) 1 2 , 1, 2.
11. (speak-on)
12. 1 : (low pass).
- (pass-through)
13. low pass 1
- 80 100 ( )
14. 1. : 0° 180°
- 15.

1) 19" 2 U,

2) speak-on 1/4" TRS -XLR

3) IEC,

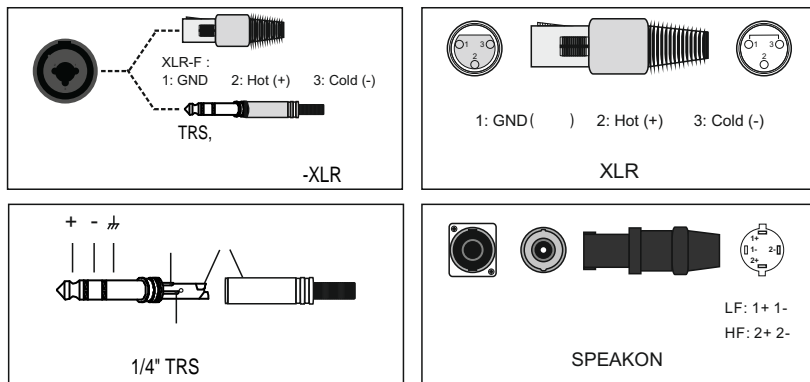

D.

1) , , :


\*  
\*  
\*  
\*

2)  
3)  
4)

6

1 2 , , 1,  
1;  
2

STEREO.

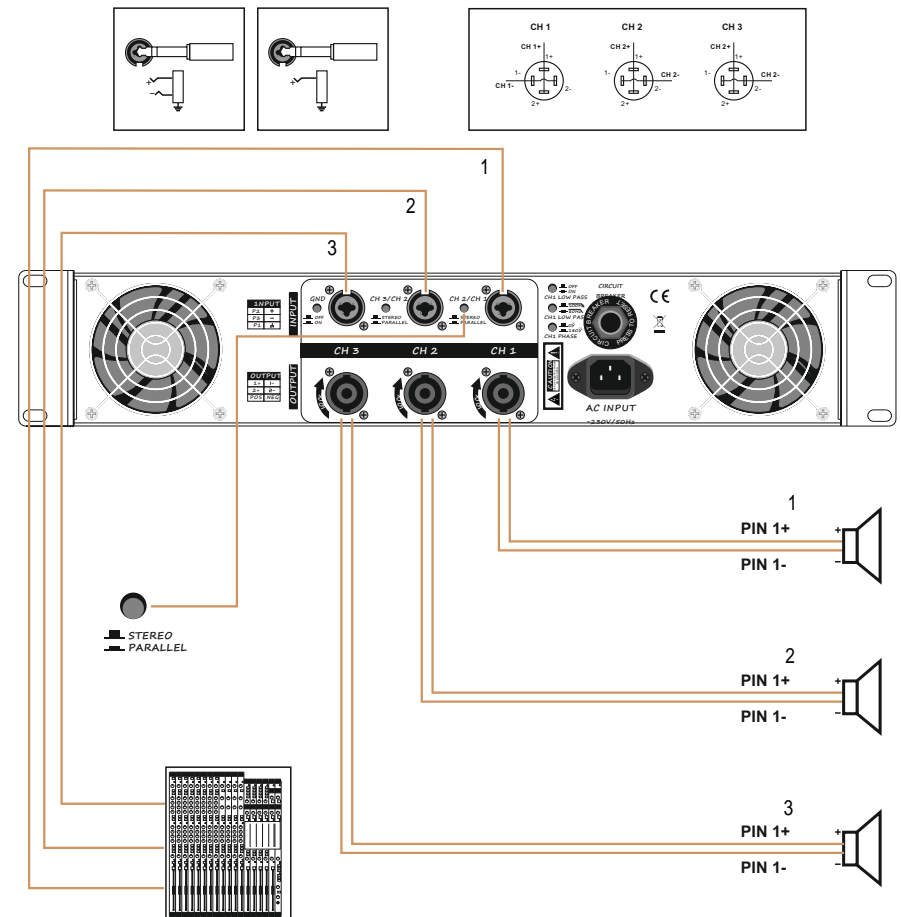

7